

Invitation of quotation
for
Construction of Toilet at Central Stores at AIIMS
Jodhpur.

Inquiry No.

AIIMS Jodh./Engg./Q.N./2021-22/07 (ii)

Inquiry Issue Date

23 November 2021

Last Date of Submission

30 November 2021 at 03:00 PM



All India Institute of Medical Sciences, Jodhpur

Basni Phase - II, Jodhpur – 342005, Rajasthan

Telefax: 0291- 2012978

www.aiimsjodhpur.edu.in



QUOTATION NOTICE

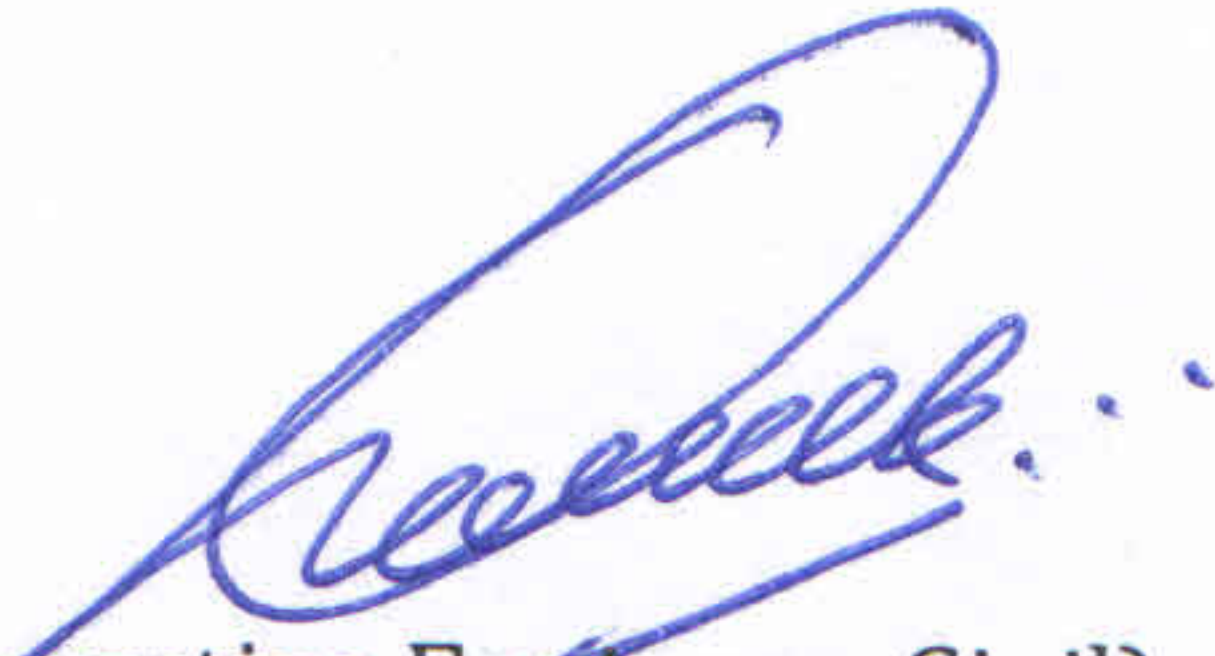
Sealed Quotations are invited from the vendors/supplier/contractor empanelled with CPWD, Railway, MES, Indian oil or other specialized/repair agencies by the undersigned on behalf of the Director, AIIMS Jodhpur for "**Construction of Toilet at Central Stores at AIIMS Jodhpur.**" Description of items and bill of quantities is given overleaf. Quotation should reach this office on or before 30 November 2021 up to 3:00 PM and the quotation will be opened on the same day at 3:30 PM in the presence of quotationers or their representative who want to be present.

General Terms and Conditions:

1. The quotations received after 30 November 2022 and unsealed shall not be entertained under any circumstances whatsoever. In case of postal delay this Institute will not be responsible. The offer Submitted Fax/Email shall not be considered and no correspondence will be entertained in this matter.
2. Quotations must be in the enclosed prescribed Performa on the letter head of the firm duly signed by the Proprietor/Partner/Director or their Authorized Representative, in case of signing of quotation by the authorized representative letter of authorization must be attached with the quotation. Quotation must be dropped in "Quotation Box" located in Administration Block of AIIMS, Jodhpur.
3. Rates must be quoted in "Indian Rupees" and as per the format specified taxes extra if any must be written separately.
4. Rates must be quoted FOR basis (including Freight charges, Insurance, installation etc.)
5. No overwriting or cutting is permitted in the rate. If found, the quotation shall be summarily rejected.
6. The rates quoted must be valid for 90 days minimum from the date of opening of the quotation.
7. Becoming L1 will not be the criteria for awarding of work unless the rates are reasonable & justified.
8. RTGS/NEFT details need to be furnished by the supplier with the quotation on the letterhead of supplier/firm/agency.
9. The firm/agency may satisfy the following conditions and attach self-attested copy of the same with the quotation:
 - The firm shall have valid GSTIN and IT PAN.
 - The firm should not be black listed by any Govt. Agency/Dept.
10. Quotations qualified by such vague and indefinite expressions such as "subject to prior confirmation", "subject to immediate acceptance" etc. will be treated as vague offers and rejected accordingly. Any conditional quotation shall be rejected summarily.
11. The time allowed for carrying out the above work is **30 days** from date of issue of work order.
12. If the supplier/vendor/contractor fails to carrying out the above work on or before the stipulated date, then a penalty at the rate of 0.5 % per week of the total order value shall be levied subject to maximum of 10% of the total order value.
13. Payment Terms: Payment will be only after satisfactory completion of work and after inspection by the AIIMS Jodhpur.
14. Disputes: In the event of any dispute or disagreement arising between the contractors and any other department of AIIMS Jodhpur with regards to the interpretation of "Terms & Conditions" of this inquiry, the same shall be referred to the Director, AIIMS Jodhpur whose decision will be final and binding upon the contractor.
15. AIIMS, Jodhpur reserves the right to increase or decrease quantity and /or amount of work. Decision of Quantity of work in the AIIMS, Jodhpur will be final in this regard.
- 16: AIIMS, Jodhpur reserves the right to reject any quotation or part or the whole of inviting quotation process without assigning any reason. Decision of the AIIMS, Jodhpur will be final in this regard.

Special Terms & Conditions:

1. Bidder must quote rate in Price Bid Form provided in Annexure-A on the letterhead of the firm.


(Executive Engineer, Civil)

[On the letterhead of firm]
ANNEXURE "A"
Price Bid Form

To,
Executive Engineer,
AIIMS, Jodhpur.

Dear Sir,

- I/We _____ Submitted the quotation for Quotation No. AIIMS Jodh./Engg./Q.N./2021-22/07 (ii), Dated: 23 November 2021 at AIIMS Jodhpur".
- I/We thoroughly examined, understood and accepted terms & conditions given in the enquiry document, failing which my quotation will be rejected out rightly.
- I/We hereby offer to supply at the following rates.

S.No	Description of work	Unit	Total Qty	Amount
1	Dismantling stone slab flooring laid in cement mortar including stacking of serviceable material and disposal of unserviceable material within 50 metres lead	sqm	9.94	
2	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:3:6 (1 Cement : 3 coarse sand (zone-III) : 6 graded stone aggregate 20 mm nominal size)	cum	1.49	
3	Brick work with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level in all shapes and sizes in : Cement mortar 1:6 (1 cement : 6 coarse sand)	cum	1.84	
4	Half brick masonry with common burnt clay F.P.S. (non modular) bricks of class designation 7.5 in superstructure above plinth level up to floor V level. Cement mortar 1:4 (1 cement :4 coarse sand)	sqm	9.20	
5	Extra for providing and placing in position 2 Nos 6mm dia. M.S. bars at every third course of half brick masonry.	sqm	9.20	
6	12 mm cement plaster of mix : 1:4 (1 cement: 4 fine sand)	sqm	71.36	
7	15 mm cement plaster on the rough side of single or half brick wall of mix : 1:4 (1 cement: 4 fine sand)	sqm	10.60	
8	Providing and laying Ceramic glazed floor tiles of size 300x300 mm (thickness to be specified by the manufacturer) of 1st quality conforming to IS : 15622 of approved make in colours such as White, Ivory, Grey, Fume Red Brown, laid on 20 mm thick cement mortar 1:4 (1 Cement : 4 Coarse sand), Jointing with grey cement slurry @ 3.3 kg/sqm including pointing the joints with white cement and matching pigment etc., complete.	sqm	9.94	
9	Providing and fixing 1st quality ceramic glazed floor tiles conforming to IS : 15622 (thickness to be specified by the manufacturer) of approved make in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge in skirting, risers of steps and dados over 12 mm thick bed of cement Mortar 1:3 (1 cement: 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm including pointing in white cement mixed with pigment of matching shade complete.	sqm	31.80	
10	Providing and laying Polished Granite stone flooring in required design and patterns, in linear as well as curvilinear portions of the building all complete as per the architectural drawings with 18 mm thick stone slab over 20 mm (average) thick base of cement mortar 1:4 (1 cement : 4 coarse sand) laid and jointed with cement slurry and pointing with white cement slurry admixed with pigment of matching shade including rubbing , curing and polishing etc. all complete as specified and as directed by the Engineer-in-Charge. Polished Granite stone slab jet Black.	sqm	10.60	
11	Providing and fixing adjustable stainless steel cramps of approved quality, required shape and size, adjustable with stainless steel nuts, bolts and washer (total weight not less than 260 gms), for dry stone cladding fixed on frame work at suitable location, including making necessary recesses in stone slab, drilling required holes etc complete as per direction of the Engineer-in-charge.	each	40.00	

12	Providing and fixing tiled false ceiling of specified materials of size 595x595 mm in true horizontal level, suspended on inter locking metal grid of hot dipped galvanized steel sections (galvanized @ 120 grams/ sqm, both side inclusive) consisting of main "T" runner with suitably spaced joints to get required length and of size 24x38 mm made from 0.30 mm thick (minimum) sheet, spaced at 1200 mm center to center and cross "T" of size 24x25 mm made of 0.30 mm thick (minimum) sheet, 1200 mm long spaced between main "T" at 600 mm center to center to form a grid of 1200x600 mm and secondary cross "T" of length 600 mm and size 24x25 mm made of 0.30 mm thick (minimum) sheet to be interlocked at middle of the 1200x600 mm panel to form grids of 600x600 mm and wall angle of size 24x24x0.3 mm and laying false ceiling tiles of approved texture in the grid including, required cutting/making, opening for services like diffusers, grills, light fittings, fixtures, smoke detectors etc. Main "T" runners to be suspended from ceiling using GI slotted cleats of size 27 x 37 x 25 x1.6 mm fixed to ceiling with 12.5 mm dia and 50 mm long dash fasteners, 4 mm GI adjustable rods with galvanised butterfly level clips of size 85 x 30 x 0.8 mm spaced at 1200 mm center to center along main T, bottom exposed width of 24 mm of all T-sections shall be pre-painted with polyester paint, all complete for all heights as per specifications, drawings and as directed by Engineer-in-charge. GI Metal Ceiling Lay in plain Tegular edge Global white color tiles of size 595x595 mm, and 0.5 mm thick with 8 mm drop; made of G I sheet having galvanizing of 100 gms/sqm (both sides inclusive) and electro statically polyester powder coated of thickness 60 microns (minimum), including factory painted after bending	sqm	9.94	
13	Supplying of S.P. 5/6 amps, one way modular switch, ISI marked, Make :- Legrand/ Havell's/ Northwest/ Schneider/ABB	Each	7.00	
14	Supplying of 6 pin 5/6 amps modular socket outlet, Make :- Legrand/ Havell's/ Northwest/ Schneider/ABB	Each	3.00	
15	Supplying Modular base& cover plate for 1 module, Make:- Legrand/ Havell's/ Northwest/ Schneider/ABB	Each	1.00	
16	Supplying Modular base & cover plate for 2 module, Make :- Legrand/ Havell's/ Northwest/ Schneider/ABB	Each	2.00	
17	Supplying Modular base & cover plate for 8 module Make :- Legrand/ Havell's/ Northwest/ Schneider/ABB	Each	1.00	
18	10 amps. ratings , SP MCB, "C" curve,10 KA breaking capacity Make:- Legrand/ Havell's/ Northwest/ Schneider/ABB	Each	1.00	
19	25 mm dia. ISI marked, PVC conduit	Meter	50.00	
20	Supplying of 2.5 sq. mm ISI marked, FRLS PVC insulated, single core copper conductor cable (RED/BLACK/GREEN) Make:- Finolex / Polycab / RRRKabel/Havell's	Meter	270.00	
21	Supplying of ventilating fans, Capacitor start, single phase with PVC impeller, ABS body, automatic openable louver shutter in existing opening Make:- CG/ Bajaj /Usha /Orient /Havell's 250 mm sweep	Each	1.00	
22	1 Feet - 5W LED TubeLight Batten, Cool White. Make:- Philips/Havells/Wipro	Each	1.00	
23	18/20W LED TubeLight Batten, Cool White. Make:- Philips/Havells/Wipro	Each	1.00	
24	LED Ceiling (Recessed) panel light 8inch *8 inch, 15-20 W Cool White. Make:- Philips/Bajaj/Havell's/wipro	Each	1.00	
25	Supplying PVC box for 8 modules. Make :- Legrand/ Havell's/ Northwest/ Schneider/ABB	Each	1.00	
26	Supplying PVC box for 1 module. Make : Legrand/Havell's/Northwest/Schneider/ABB	Each	1.00	
27	Supplying PVC box for 2 modules. Make : Legrand/Havell's/Northwest/Schneider/ABB	Each	2.00	
Total Amount in Figure (including Taxes):				
Total Amount in Words (including Taxes): _____				

Date _____

Place _____

Signature of Authorised Person: _____

Name of the Firm/Agency: _____

Phone No: _____

Firm's GSTIN: _____

Firm's PAN No: _____

Bank Account No: _____

Bank Name: _____

Branch: _____ IFSC Code _____